



EMC TEST REPORT

Client Information:

Applicant: Zhongying Optoelectronics (Shenzhen) Technology Co., LTD
Applicant add.: 4th Floor, Building B, Jingchengda Science Park, Shiyan Street, Baoan District, Shenzhen
Brand Name: N/A

Product Information:

Product Name: Neck hung fan
Model No.: Z3
Derivative model No.: N/A
Test Procedure Used: EN 55014-1:2016
EN 61000-3-2:2014, EN 61000-3-3:2013
EN 55014-2:2015
EN 61000-4-2:2009, EN 61000-4-3:2006+A1:2008+A2:2010,
EN 61000-4-4:2012, EN 61000-4-5:2014,
EN 61000-4-6:2014, EN 61000-4-11:2004

Test Date: May 13 to May 18, 2022 Issue Date: May 18, 2022

Test Result: PASS

Shenzhen iTC Product Testing Co., Ltd.

Issued by: Add. : Room 204, No.10, Phase 1, Xinhe Xinxing Third Industrial Area, Fuhai Road, Fuyong Street, Bao'an District, Shenzhen, Guangdong, China

Tested by	Amanda Chen		Amanda Chen
Reviewed by	Apple Huang		Apple Huang
Approved by	John Liu		John Liu

This test report may be reproduced in full only
Test result presented in this test report is applicable to the tested sample only

TABLE OF CONTENT

	Page
Test Report Declaration	
1. GENERAL INFORMATION.....	4
1.1. Description of Device (EUT).....	4
1.2. Tested System Details.....	4
1.3. Test Uncertainty.....	4
1.4. Test Facility.....	5
2. TEST INSTRUMENT USED.....	6
3. CONDUCTED EMISSION AT THE MAINS TERMINALS TEST.....	9
3.1. Block Diagram Of Test Setup.....	9
3.2. Test Standard.....	9
3.3. Power Line Conducted Emission Limit.....	9
3.4. EUT Configuration on Test.....	9
3.5. Operating Condition of EUT.....	9
3.6. Test Procedure.....	10
3.7. Test Result.....	10
4. RADIATION EMISSION TEST.....	11
4.1. Block Diagram of Test Setup.....	11
4.2. Test Standard.....	11
4.3. Radiation Limit.....	11
4.4. EUT Configuration on Test.....	12
4.5. Operating Condition of EUT.....	12
4.6. Test Procedure.....	12
4.7. Test Result.....	12
5. HARMONIC CURRENT EMISSION TEST.....	15
5.1. Block Diagram of Test Setup.....	15
5.2. Test Standard.....	15
5.3. Operating Condition of EUT.....	15
5.4. Test Procedure.....	15
5.5. Test Results.....	15
6. VOLTAGE FLUCTUATIONS & FLICKER TEST.....	16
6.1. Block Diagram of Test Setup.....	16
6.2. Test Standard.....	16
6.3. Operating Condition of EUT.....	16
6.4. Test Procedure.....	16
6.5. Test Results.....	16
7. ELECTROSTATIC DISCHARGE IMMUNITY TEST.....	17
7.1. Block Diagram of Test Setup.....	17
7.2. Test Standard.....	17
7.3. Severity Levels and Performance Criterion.....	17
7.4. EUT Configuration.....	18
7.5. Operating Condition of EUT.....	18
7.6. Test Procedure.....	18
7.7. Test Results.....	19
8. RF FIELD STRENGTH SUSCEPTIBILITY TEST.....	20
8.1. Block Diagram of Test Setup.....	20
8.2. Test Standard.....	20
8.3. Severity Levels and Performance Criterion.....	20
8.4. EUT Configuration on Test.....	21
8.5. Operating Condition of EUT.....	21
8.6. Test Procedure.....	22
8.7. Test Results.....	22

9.	ELECTRICAL FAST TRANSIENT/BURST IMMUNITY TEST	23
9.1.	Block Diagram of EUT Test Setup	23
9.2.	Test Standard	23
9.3.	Severity Levels and Performance Criterion	23
9.4.	EUT Configuration on Test	24
9.5.	Operating Condition of EUT	24
9.6.	Test Procedure	24
9.7.	Test Results	24
10.	SURGE TEST	25
10.1.	Block Diagram of EUT Test Setup	25
10.2.	Test Standard	25
10.3.	Severity Levels and Performance Criterion	25
10.4.	EUT Configuration on Test	26
10.5.	Operating Condition of EUT	26
10.6.	Test Procedure	26
10.7.	Test Result	26
11.	INJECTED CURRENTS SUSCEPTIBILITY TEST	27
11.1.	Block Diagram of EUT Test Setup	27
11.2.	Test Standard	27
11.3.	Severity Levels and Performance Criterion	27
11.4.	EUT Configuration on Test	28
11.5.	Operating Condition of EUT	28
11.6.	Test Procedure	28
11.7.	Test Result	29
12.	VOLTAGE DIPS AND INTERRUPTIONS TEST	30
12.1.	Block Diagram of EUT Test Setup	30
12.2.	Test Standard	30
12.3.	Severity Levels and Performance Criterion	30
12.4.	EUT Configuration on Test	31
12.5.	Operating Condition of EUT	31
12.6.	Test Procedure	31
12.7.	Test Result	31
13.	EUT PHOTOGRAPHS	32

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

EUT : Neck hung fan
Model Number : Z3
Trademark : N/A
Power Supply : Input: DC 5V from adapter or DC 3.7V from battery
Test Voltage : DC 3.7V
Battery : DC 3.7V 1000mAh

1.2. Tested System Details

None.

1.3. Test Uncertainty

Conducted Emission Uncertainty : $\pm 2.66\text{dB}$

Radiated Emission Uncertainty : $\pm 4.26\text{dB}$



1.4. Test Facility

Site Description

Name of Firm Shenzhen iTC Product Testing Co., Ltd.

Site Location Room 204, No.10, Phase 1, Xinhe Xinxing Third
Industrial Area, Fuhai Road, Fuyong Street, Bao'an
District, Shenzhen, Guangdong, China

2. TEST INSTRUMENT USED

For Conducted Emission at the mains terminals Test

Conducted Emission Test (A --- site)					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
843 Shielded Room	ChengYu	843 Room	843	Aug. 25, 2021	Aug. 24, 2022
EMI Receiver	R&S	ESCI	101421	Aug. 27, 2021	Aug. 26, 2022
LISN	SCHWARZBECK	NSLK8127	812779	Sep. 07, 2021	Sep. 06, 2022
Pulse Limiter	R&S	ESH3-Z2	100681	Aug. 25, 2021	Aug. 24, 2022
843 Cable 1#	FUJIKURA	843C1#	001	Aug. 25, 2021	Aug. 24, 2022

For Radiated Emission Test

Radiation Emission Test (966 chamber)					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
966 chamber	ChengYu	966 Room	966	Aug. 25, 2021	Aug. 24, 2022
Spectrum Analyzer	Agilent	E4407B	MY45109572	Aug. 27, 2021	Aug. 26, 2022
Amplifier	Schwarzbeck	BBV9743	9743-119	Aug. 25, 2021	Aug. 24, 2022
Amplifier	Schwarzbeck	BBV9718	9718-270	Aug. 25, 2021	Aug. 24, 2022
Log-periodic Antenna	Schwarzbeck	VULB9160	VULB9160-3369	Sep. 07, 2021	Sep. 06, 2022
EMI Receiver	R&S	ESCI	101421	Aug. 27, 2021	Aug. 26, 2022
Horn Antenna	Schwarzbeck	BBHA9120D	9120D-1275	Aug. 25, 2021	Aug. 24, 2022
966 Cable 1#	CHENGYU	966	004	Aug. 25, 2021	Aug. 24, 2022
966 Cable 2#	CHENGYU	966	003	Aug. 25, 2021	Aug. 24, 2022

For Harmonic & Flicker Test

For Harmonic / Flicker Test (A --- site)					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
Harmonic / Flicker Analyzer	KIKUSUI	KHA1000	VA002445	Sep. 07, 2021	Sep. 06, 2022
AC Power Supply	KIKUSUI	PCR4000M	UK001879	Sep. 07, 2021	Sep. 06, 2022
Line Impedance network	KIKUSUI	LIN1020JF	UL001611	Sep. 07, 2021	Sep. 06, 2022

For Electrostatic Discharge Immunity Test

For Electrostatic Discharge Immunity Test (A --- site)					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
ESD Tester	KIKISUI	KES4201A	UH002321	Aug. 28, 2021	Aug. 27, 2022

For RF Field Strength Susceptibility Test(SMQ)

For RF Field Strength Susceptibility Test (SMQ --- site)					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
Signal Generator	HP	8648A	3625U00573	Sep. 26, 2021	Sep. 26, 2022
Amplifier	A&R	500A100	17034	Sep. 26, 2021	Sep. 26, 2022
Amplifier	A&R	100W/1000M1	17028	Sep. 26, 2021	Sep. 26, 2022
Audio Analyzer (20Hz~1GHz)	Panasonic	2023B	202301/428	Sep. 26, 2021	Sep. 26, 2022
Isotropic Field Probe	A&R	FP2000	16755	Sep. 26, 2021	Sep. 26, 2022
Antenna	EMCO	3108	9507-2534	Sep. 26, 2021	Sep. 26, 2022
Log-periodic Antenna	A&R	AT1080	16812	Sep. 26, 2021	Sep. 26, 2022

For Electrical Fast Transient /Burst Immunity Test

For Electrical Fast Transient/Burst Immunity Test (A --- site)					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
Burst Tester	Prima	EFT61004AG	PR14054467	Aug. 27, 2021	Aug. 26, 2022
Coupling Clamp	Prima	EFT61004AG	BCTC009E	Aug. 27, 2021	Aug. 26, 2022

For Surge Test

For Surge Test (A --- site)					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
Burst Tester	Prima	EFT61004AG	PR14054467	Aug. 27, 2021	Aug. 26, 2022

For Injected Currents Susceptibility Test


For Injected Currents Susceptibility Test (A --- site)					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
C/S Test System	SCHLODER	CDG600	126B1281	Aug. 27, 2021	Aug. 26, 2022
CDN	SCHLODER	CDN-M2+3	A2210320/20 15	Aug. 27, 2021	Aug. 26, 2022
Injection Clamp	SCHLOBER	EMCL-20	132A1214/20 15	Aug. 27, 2021	Aug. 26, 2022

For Voltage Dips Interruptions Test

For Voltage Dips Interruptions Test (A --- site)					
Equipment	Manufacturer	Model#	Serial#	Last Cal.	Next Cal.
Dips Tester	Prima	DRP61011AG	PR14086284	Aug. 27, 2021	Aug. 26, 2022

3. CONDUCTED EMISSION AT THE MAINS TERMINALS TEST

3.1. Block Diagram Of Test Setup

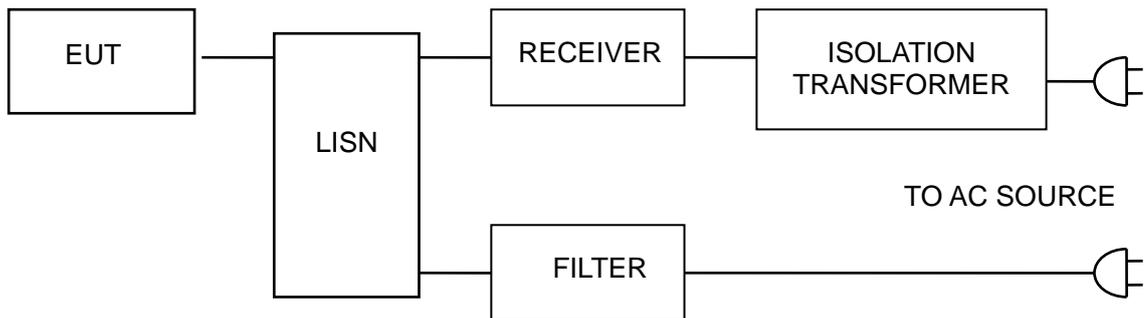

3.2. Test Standard

EN 55014-1:2016

3.3. Power Line Conducted Emission Limit

Frequency MHz	Limits dB(μ V)	
	Quasi-peak Level	Average Level
0.15 ~ 0.50	66 ~ 56*	56 ~ 46*
0.50 ~ 5.00	56	46
5.00 ~ 30.00	60	50

Notes: 1. *Decreasing linearly with logarithm of frequency.

2. The lower limit shall apply at the transition frequencies.

3.4. EUT Configuration on Test

The following equipments are installed on conducted emission test to meet EN 55014-1 requirement and operating in a manner which tends to maximize its emission characteristics in a normal application.

3.5. Operating Condition of EUT

3.5.1 Setup the EUT and simulators as shown in Section 3.1.

3.5.2 Turn on the power of all equipments.

3.5.3 Let the EUT work in test modes and test it.

3.6. Test Procedure

The EUT is put on the ground and connected to the AC mains through a Artificial Mains Network (AMN). This provided a 50ohm coupling impedance for the tested equipments. Both sides of AC line are checked to find out the maximum conducted emission levels according to the **EN 55014-1** regulations during conducted emission test.

The bandwidth of the test receiver (R&S Test Receiver ESCI) is set at 10KHz.


The frequency range from 150 KHz to 30 MHz is investigated.

3.7. Test Result

N/A

4.RADIATION EMISSION TEST

4.1.Block Diagram of Test Setup

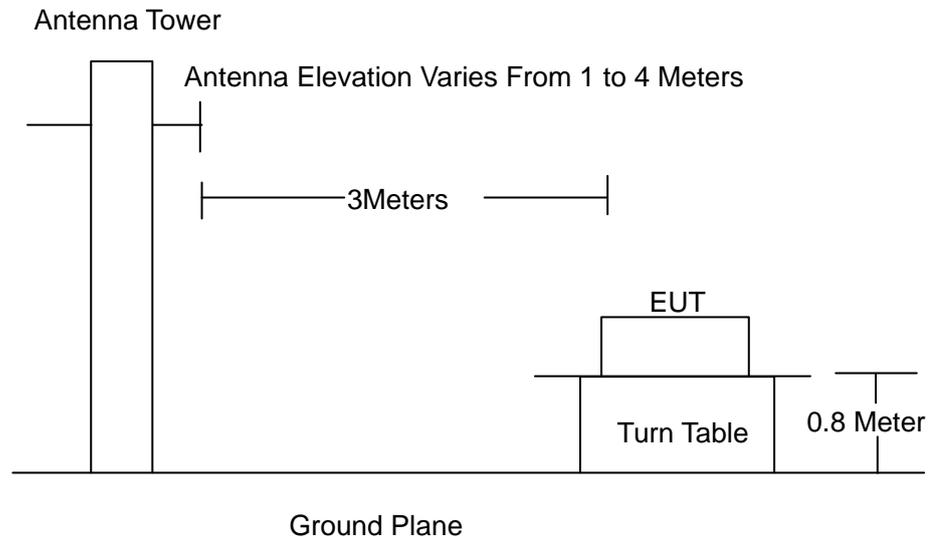

4.2.Test Standard

EN 55014-1:2016

4.3.Radiation Limit

Frequency MHz	Distance (Meters)	Field Strengths Limits dB(μ V)/m
		40.0
230 ~ 1000	3	47.0

Remark:

- (1) Emission level (dB(μ V)/m) = 20 log Emission level (μ V/m)
- (2) The smaller limit shall apply at the cross point between two frequency bands.
- (3) Distance refers to the distance in meters between the measuring instrument, antenna and the closed point of any part of the device or system.

4.4.EUT Configuration on Test

The EN 55014-1 regulations test method must be used to find the maximum emission during radiated emission test.

The configuration of EUT is the same as used in conducted emission test. Please refer to Section 2.2.

4.5.Operating Condition of EUT

Same as conducted emission test, which is listed in Section 2.2 except the test set up replaced as Section 4.1.

4.6.Test Procedure

The EUT and its simulators are placed on a turned table that is 0.8 meter above the ground. The turned table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna that is mounted on the antenna tower. The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level. Broadband antenna (calibrated biconical and log periodical antenna) is used as receiving antenna. Both horizontal and vertical polarization of the antenna is set on test. In order to find the maximum emission levels, the interface cable must be manipulated according to EN 55014-1 on radiated emission test.

The bandwidth setting on the field strength meter (R&S Test Receiver ESCI) is set at 120KHz.


The frequency range from 30MHz to 1000MHz is checked.

4.7.Test Result

PASS


Please refer to the following page.

Radiation Emission Test Data			
Temperature:	24.5 °C	Relative Humidity:	54%
Pressure:	1009hPa	Phase :	Horizontal
Test Voltage :	DC 3.7V	Test Mode:	Working Mode

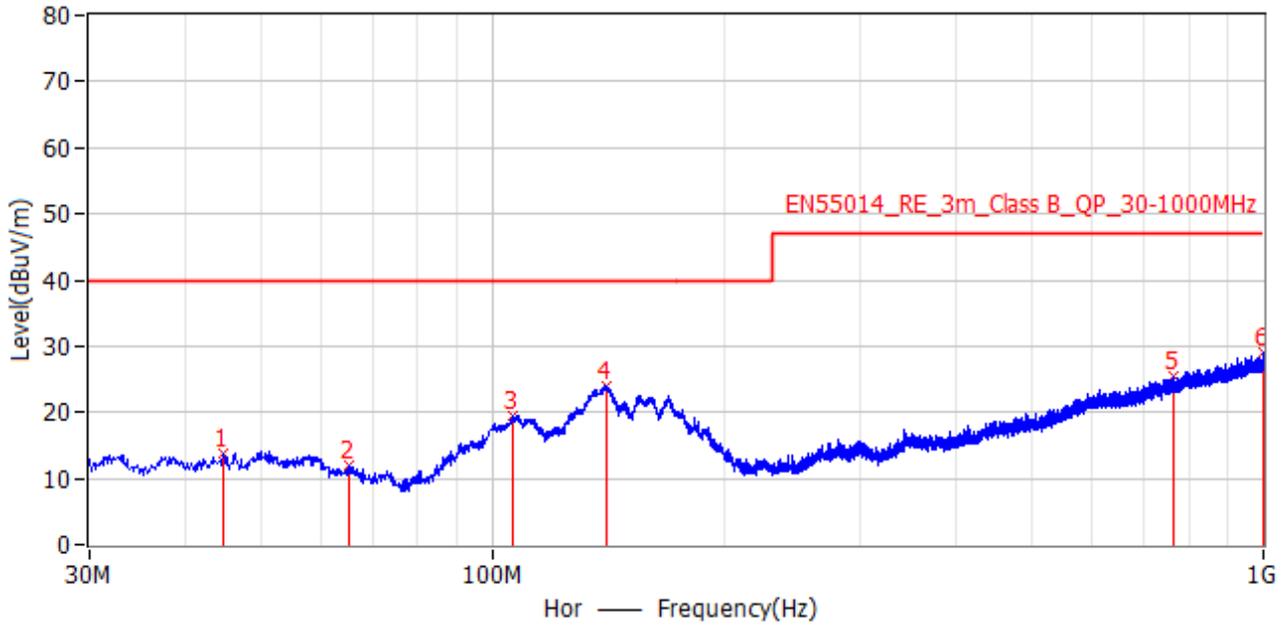

No.	Frequency	Level dBuV/m	Factor dB/m	Limit dBuV/m	Margin dB	Detector	Polar	Height cm	Angle deg
1*	44.792 MHz	13.9	13.4	40.0	-26.1	PK	Hor	200.0	38.0
2*	65.041 MHz	11.9	12.0	40.0	-28.1	PK	Hor	200.0	359.0
3*	106.024 MHz	19.6	10.3	40.0	-20.4	PK	Hor	200.0	27.0
4*	140.701 MHz	23.9	12.8	40.0	-16.1	PK	Hor	200.0	190.0
5*	764.896 MHz	25.4	23.8	47.0	-21.6	PK	Hor	200.0	14.0
6*	997.211 MHz	29.2	26.4	47.0	-17.8	PK	Hor	200.0	83.0


Radiation Emission Test Data			
Temperature:	24.5 °C	Relative Humidity:	54%
Pressure:	1009hPa	Phase :	Vertical
Test Voltage :	DC 3.7V	Test Mode:	Working Mode

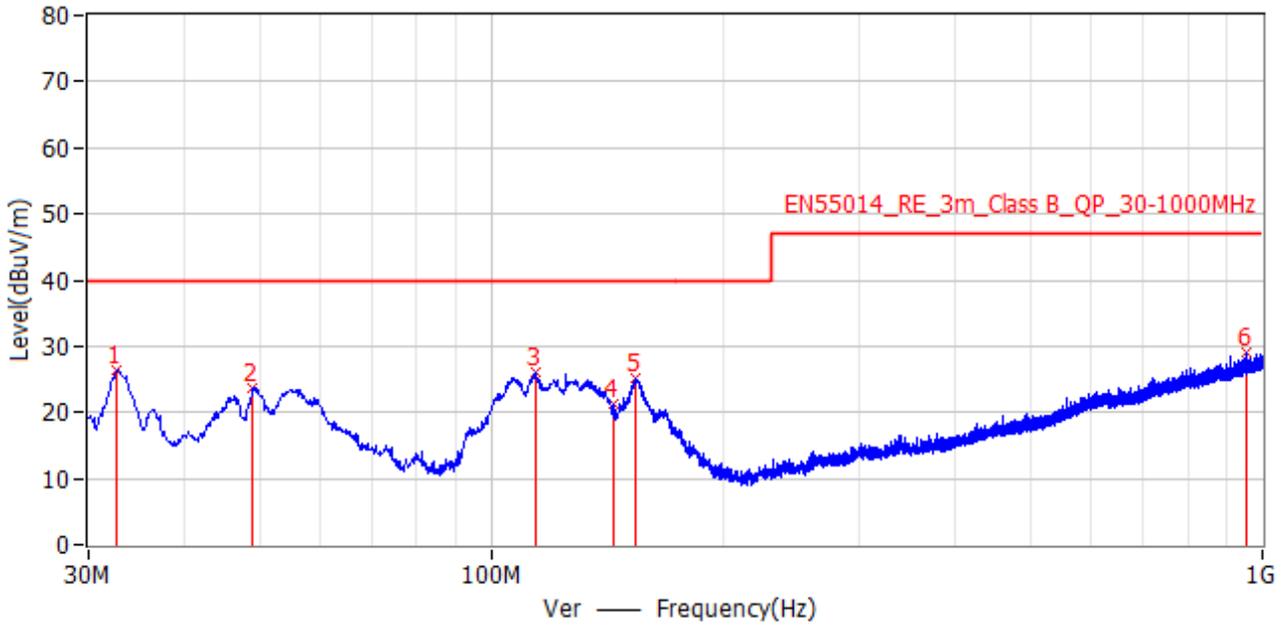

No.	Frequency	Level dBuV/m	Factor dB/m	Limit dBuV/m	Margin dB	Detector	Polar	Height cm	Angle deg
1*	32.667 MHz	26.4	12.7	40.0	-13.6	PK	Ver	100.0	211.0
2*	48.915 MHz	23.7	13.4	40.0	-16.3	PK	Ver	100.0	83.0
3*	114.390 MHz	26.1	11.1	40.0	-13.9	PK	Ver	100.0	0.0
4*	143.975 MHz	21.2	13.1	40.0	-18.8	PK	Ver	100.0	102.0
5*	154.160 MHz	25.3	13.6	40.0	-14.7	PK	Ver	100.0	130.0
6*	951.379 MHz	29.0	26.3	47.0	-18.0	PK	Ver	100.0	359.0

5.HARMONIC CURRENT EMISSION TEST

5.1. Block Diagram of Test Setup

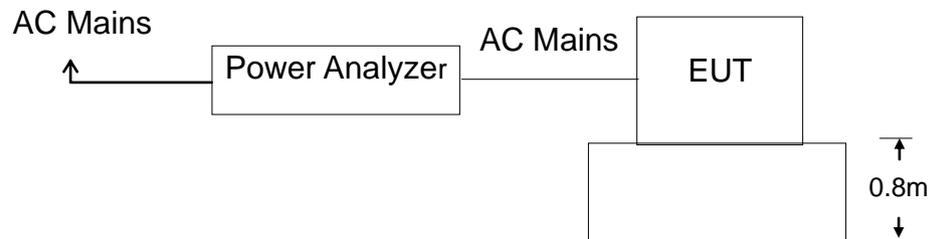

5.2. Test Standard

EN 61000-3-2:2014

5.3. Operating Condition of EUT

5.3.1 Setup the EUT as shown in Section 5.1.

5.3.2 Turn on the power of all equipments.

5.3.3 Let the EUT work in test mode and test it.

5.4. Test Procedure

The power cord of the EUT is connected to the output of the test system. Turn on the power of the EUT and use the test system to test the harmonic current level.

5.5. Test Results

N/A

6.VOLTAGE FLUCTUATIONS & FLICKER TEST

6.1.Block Diagram of Test Setup

Same as Section 6.1..

6.2.Test Standard

EN 61000-3-3:2013

6.3.Operating Condition of EUT

Same as Section 5.3.. The power cord of the EUT is connected to the output of the test system. Turn on the power of the EUT and use the test system to test the harmonic current level.

Flicker Test Limit

Test items	Limits
Pst	1.0
dc	3.3%
Tmax	4.0%
dt	Not exceed 3.3% for 500ms

6.4. Test Procedure


The power cord of the EUT is connected to the output of the test system. Turn on the power of the EUT and use the test system to test the harmonic current level.

6.5.Test Results

N/A

7.ELECTROSTATIC DISCHARGE IMMUNITY TEST

7.1.Block Diagram of Test Setup

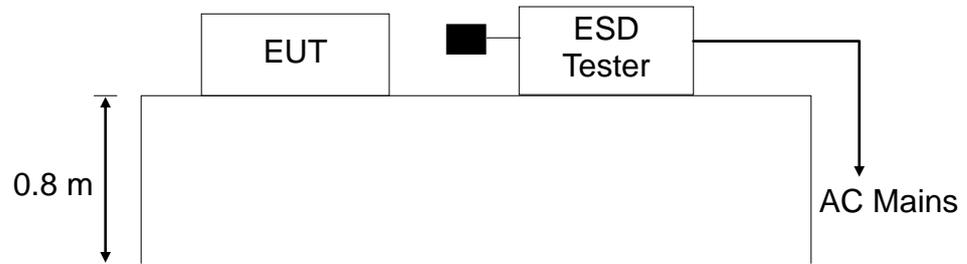

7.2.Test Standard

EN 55014-2:2015, EN 61000-4-2:2009

Severity Level: 3 / Air Discharge:±8KV
Level: 2 / Contact Discharge:±4KV

7.3.Severity Levels and Performance Criterion

7.3.1 Severity level

Level	Test Voltage Contact Discharge (KV)	Test Voltage Air Discharge (KV)
1.	±2	±2
2.	±4	±4
3.	±6	±8
4.	±8	±15
X	Special	Special

7.3.2 Performance criterion : B

A. The apparatus shall continue to operate as intended during the test. No degradation of performance or loss of function is allowed below a performance level (or permissible loss of performance) specified by the manufacturer, when the apparatus is used as i

B. The apparatus shall continue to operate as intended after the test. No

degradation of performance or loss of function is allowed below a performance level (or permissible loss of performance) specified by the manufacturer, when the apparatus is used as intended. During the test, degradation of performance is allowed, however, no change of actual operating state or stored data is allowed. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and from what the user may reasonably expect from the apparatus if used as intended.

- C.** Temporary loss of function is allowed, provided the function is self-recoverable or can be restored by the operation of the controls, or by any operation specified in the instructions for use.

7.4.EUT Configuration

The following equipments are installed on Electrostatic Discharge Immunity test to meet EN 55014-2:2015, EN 61000-4-2:2009, requirement and operating in a manner which tends to maximize its emission characteristics in a normal application. The configuration of EUT is the same as used in conducted emission test.

Please refer to Section 2.4.

7.5.Operating Condition of EUT

Same as conducted emission measurement, which is listed in Section 3.5 except the test setup replaced by Section 7.1.2.

7.6.Test Procedure

7.6.1 Air Discharge:

This test is done on a non-conductive surface. The round discharge tip of the discharge electrode shall be approached as fast as possible to touch the EUT. After each discharge, the discharge electrode shall be removed from the EUT. The generator is then re-triggered for a new single discharge and repeated 10 times for each pre-selected test point. This procedure shall be repeated until all the air discharge completed.

7.6.2 Contact Discharge:

All the procedure shall be same as Section 7.6.1. Except that the tip of the discharge electrode shall touch the EUT before the discharge switch is operated.

7.6.3 Indirect discharge for horizontal coupling plane

At least 10 single discharges (in the most sensitive polarity) shall be applied at the front edge of each HCP opposite the center point of each unit (if applicable) of the EUT and 0.1m from the front of the EUT. The long axis of the discharge electrode shall be in the plane of the HCP and perpendicular to its front edge during the discharge.

7.6.4 Indirect discharge for vertical coupling plane

At least 10 single discharges (in the most sensitive polarity) shall be applied to the center of one vertical edge of the coupling plane. The coupling plane, of dimensions 0.5m X 0.5m, is placed parallel to, and positioned at a distance of 0.1m from the EUT. Discharges shall be applied to the coupling plane, with this plane in sufficient different positions that the four faces of the EUT are complete illuminated.

7.7. Test Results


PASS

Please refer to the following page.

ESD Test Data				
Temperature:	24.5°C	Humidity:	53%	
Power Supply :	DC 3.7V	Test Mode:	Working Mode	
Air Discharge: ± 8KV				
Contact Discharge: ± 4KV				
Test Points	Air Discharge	Contact Discharge	Performance Criterion	Result
Enclosure	±2,4,8KV	N/A	B	PASS
Slit	±2,4,8KV	N/A	B	PASS
Metal Part	N/A	±2,4 KV	B	PASS
VCP	N/A	±2,4 KV	B	PASS
HCP	N/A	±2,4 KV	B	PASS
Note: N/A				

8.RF FIELD STRENGTH SUSCEPTIBILITY TEST

8.1.Block Diagram of Test Setup

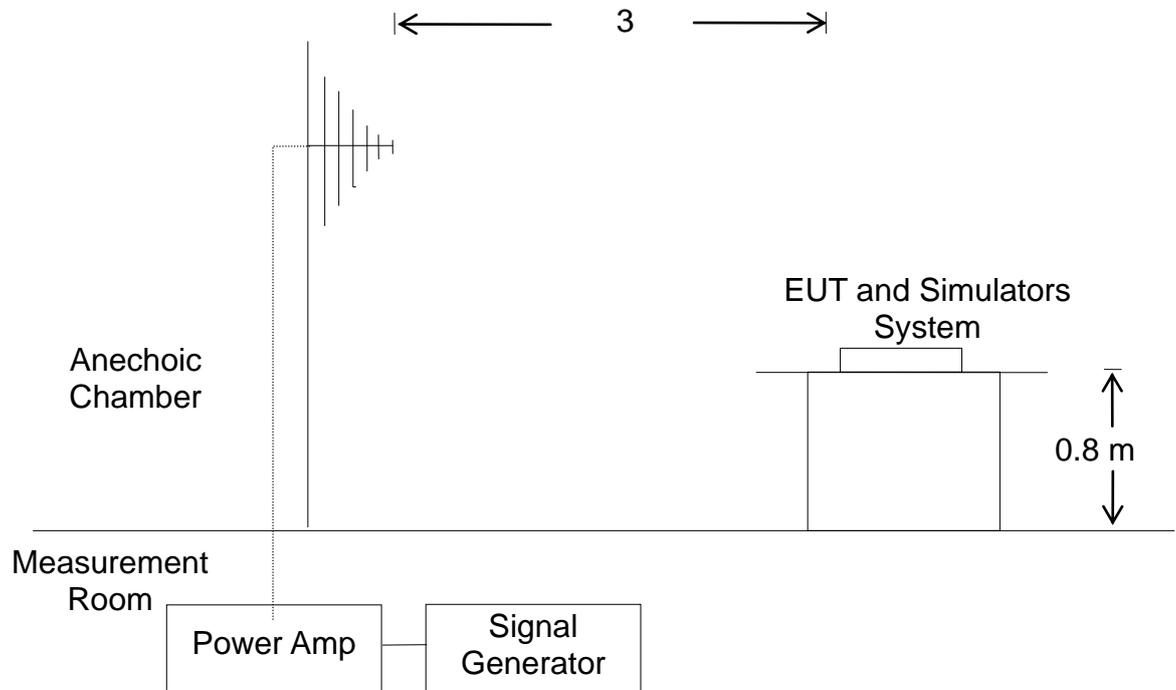

8.2.Test Standard

EN 55014-2:2015,
EN 61000-4-3: 2006+A1:2008+A2:2010

Severity Level 2, 3V / m

8.3.Severity Levels and Performance Criterion

8.3.1. Severity level

Level	Field Strength V/m
1.	1
2.	3
3.	10
X.	Special

8.3.2. Performance criterion: A

A、 The apparatus shall continue to operate as intended during the test.

No degradation of performance or loss of function is allowed below a performance level (or permissible loss of performance) specified by the manufacturer, when the apparatus is used as i

- B、 The apparatus shall continue to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level (or permissible loss of performance) specified by the manufacturer, when the apparatus is used as intended. During the test, degradation of performance is allowed, however, no change of actual operating state or stored data is allowed. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and from what the user may reasonably expect from the apparatus if used as intended.
- C、 Temporary loss of function is allowed, provided the function is self-recoverable or can be restored by the operation of the controls, or by any operation specified in the instructions for use.

8.4.EUT Configuration on Test

The following equipments are installed on Electrical Fast Transient/Burst Immunity test to meet EN 55014-2:2015, EN 61000-4-4:2012, requirement and operating in a manner which tends to maximize its emission characteristics in a normal application. The configuration of EUT is the same as used in conducted emission test.

Please refer to Section 3.4.

8.5.Operating Condition of EUT

Same as conducted emission measurement, which is listed in Section 2.5 except the test setup replaced by Section 8.1.

8.6. Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 meter above ground. EUT is set 3 meter away from the transmitting antenna which is mounted on an antenna tower. Both horizontal and vertical polarization of the antenna are set on test. Each of the four sides of EUT must be faced this transmitting antenna and measured individually.

All the scanning conditions are as follows :

Condition of Test	Remarks
1. Fielded Strength	3 V/m (Severity Level 2)
2. Radiated Signal	Modulated
3. Scanning Frequency	80 – 1000 MHz
4. Dwell time of radiated	0.0015 decade/s
5. Waiting Time	1 Sec.

8.7. Test Results

PASS

Please refer to the following page.

R/S Test Data			
Temperature : 25°C		Humidity : 53%	
Field Strength: 3 V/m		Criterion: A	
Power Supply: DC 3.7V		Frequency Range: 80 MHz to 1000 MHz	
Modulation: <input checked="" type="checkbox"/> AM <input type="checkbox"/> Pulse <input type="checkbox"/> none 1 KHz 80%			
Test Mode : On			
Frequency Range : 80-1000MHz			
Steps	1 %		
	Horizontal	Vertical	Result
Front	A	A	Pass
Right	A	A	Pass
Rear	A	A	Pass
Left	A	A	Pass
Note: N/A			

9.ELECTRICAL FAST TRANSIENT/BURST IMMUNITY TEST

9.1.Block Diagram of EUT Test Setup



9.2.Test Standard

EN 55014-2:2015, EN 61000-4-4:2012

9.3.Severity Levels and Performance Criterion

Severity Level 2 at 1KV, Pulse Rise time & Duration: 5 nS / 50 nS

Severity Level:

Open Circuit Output Test Voltage $\pm 10\%$		
Level	On power ports	On I/O(Input/Output) Signal data and control ports
1.	0.5KV	0.25KV
2.	1KV	0.5KV
3.	2KV	1KV
4.	4KV	2KV
X.	Special	Special

Performance criterion: B

- A. The apparatus shall continue to operate as intended during the test. No degradation of performance or loss of function is allowed below a performance level (or permissible loss of performance) specified by the manufacturer, when the apparatus is used as i
- B. The apparatus shall continue to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level (or permissible loss of performance) specified by the manufacturer, when the apparatus is used as intended. During the test, degradation of performance is allowed, however, no change of actual operating state or stored data is allowed. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and from what the user may reasonably expect from the apparatus if used as intended.
- C. Temporary loss of function is allowed, provided the function is self-recoverable or can be restored by the operation of the controls, or by any operation specified in the instructions for use.

9.4.EUT Configuration on Test

The following equipments are installed on Electrical Fast Transient/Burst Immunity test to meet EN 55014-2:2015, EN 61000-4-4:2012, requirement and operating in a manner which tends to maximize its emission characteristics in a normal application. The configuration of EUT is the same as used in conducted emission test.

Please refer to Section 3.4.

9.5.Operating Condition of EUT

Same as conducted emission measurement, which is listed in Section 2.6 except the test setup replaced by Section 9.1.

9.6.Test Procedure

EUT shall be placed 0.8m high above the ground reference plane which is a min.1m*1m metallic sheet with 0.65mm minimum thickness. This reference ground plane shall project beyond the EUT by at least 0.1m on all sides and the minimum distance between EUT and all other conductive structure, except the ground plane beneath the EUT, shall be more than 0.5m

9.6.1. For input and output AC power ports:


The EUT is connected to the power mains by using a coupling device which couples the EFT interference signal to AC power lines. Both polarities of the test voltage should be applied during compliance test and the duration of the test is 2 minutes.

9.7.Test Results

N/A

10. SURGE TEST

10.1. Block Diagram of EUT Test Setup



10.2. Test Standard

EN 55014-2:2015, EN61000-4-5:2014

10.3. Severity Levels and Performance Criterion

Severity Level: Line to Line, Level 2 at 1KV;

Severity Level: Line to Earth, Level 3 at 2KV.

Severity Level	Open-Circuit Test Voltage (KV)
1.	0.5
2.	1.0
3.	2.0
4.	4.0
X.	Special

Performance criterion: B

- A. The apparatus shall continue to operate as intended during the test. No degradation of performance or loss of function is allowed below a performance level (or permissible loss of performance) specified by the manufacturer, when the apparatus is used as i
- B. The apparatus shall continue to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level (or permissible loss of performance) specified by the manufacturer, when the apparatus is used as intended. During the test, degradation of performance is allowed, however, no change of actual operating state or stored data is allowed. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and from what the user may reasonably expect from the apparatus if used as intended.
- C. Temporary loss of function is allowed, provided the function is self-recoverable or can be restored by the operation of the controls, or by any operation specified in the instructions for use.

10.4. EUT Configuration on Test

The following equipments are installed on Electrical Fast Transient/Burst Immunity test to meet EN 55014-2:2015, EN61000-4-5:2014, requirement and operating in a manner which tends to maximize its emission characteristics in a normal application

The configuration of EUT is the same as used in conducted emission test. Please refer to Section 3.4.

10.5. Operating Condition of EUT

Same as conducted emission measurement, which is listed in Section 2.7 except the test setup replaced by Section 10.1.

10.6. Test Procedure


- 1) Set up the EUT and test generator as shown on section 10.1
- 2) For line to line coupling mode, provide a 1KV 1.2/50us voltage surge (at open-circuit condition) and 8/20us current surge to EUT selected points.
- 3) At least 5 positive and 5 negative (polarity) tests with a maximum 1/min repetition rate are conducted during test.
- 4) Different phase angles are done individually.
- 5) Repeat procedure 2) to 4) except the open-circuit test voltage change from 1KV to 2KV for line to earth coupling mode test.
- 6) Record the EUT operating situation during compliance test and decide the EUT immunity criterion for above each test.

10.7. Test Result

N/A

11. INJECTED CURRENTS SUSCEPTIBILITY TEST

11.1. Block Diagram of EUT Test Setup

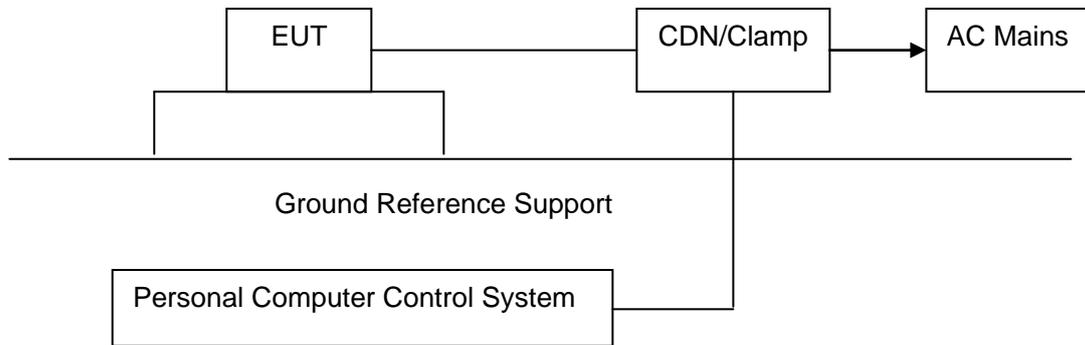

11.2. Test Standard

EN 55014-2:2015, EN61000-4-6:2014

11.3. Severity Levels and Performance Criterion

Severity Level 2: 3V(rms), 150KHz ~ 80MHz

Severity Level:

Level	Field Strength V
1.	1
2.	3
3.	10
X.	Special

Performance criterion: A

- A. The apparatus shall continue to operate as intended during the test. No degradation of performance or loss of function is allowed below a performance level (or permissible loss of performance) specified by the manufacturer, when the apparatus is used as intended.
- B. The apparatus shall continue to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level (or permissible loss of performance) specified by the manufacturer, when the apparatus is used as intended. During the test, degradation of performance is allowed, however, no change of actual operating state or stored data is allowed. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and from what the user may reasonably expect from the apparatus if used as intended.
- C. Temporary loss of function is allowed, provided the function is self-recoverable or can be restored by the operation of the controls, or by any operation specified in the instructions for use.

11.4. EUT Configuration on Test

The configuration of EUT is the same as used in conducted emission test. Please refer to Section 2.8.

11.5. Operating Condition of EUT

Same as conducted emission test, which is listed in Section 2.8 except the test set up replaced as Section 11.1.

11.6. Test Procedure

- 1) Set up the EUT, CDN and test generator as shown on section 11.1
- 2) Let EUT work in test mode and measure.
- 3) The EUT and supporting equipments are placed on an insulating support 0.1m high above a ground reference plane. CDN (coupling and decoupling device) is placed on the ground plane at above 0.1-0.3m from EUT. Cables between CDN and EUT are as short as possible, and their height above the ground reference plane shall be between 30 and 50 mm (where possible).
- 4) The disturbance signal described below is injected to EUT through CDN.
- 5) The EUT operates within its operational mode(s) under intended climatic conditions after power on.

- 6) The frequency range is swept from 150KHz to 80MHz using 3V signal

level, and with the disturbance signal 80% amplitude modulated with a 1KHz sine wave


- 7) The rate of sweep shall not exceed 1.5×10^{-3} decades/s. Where the frequency is swept incrementally, the step size shall not exceed 1% of the start and thereafter 1% of the preceding frequency value.
- 8) Recording the EUT operating situation during compliance test and decide the EUT immunity criterion for above each test.

11.7. Test Result

N/A

12. VOLTAGE DIPS AND INTERRUPTIONS TEST

12.1. Block Diagram of EUT Test Setup



12.2. Test Standard

EN 55014-2:2015, EN61000-4-11:2004

12.3. Severity Levels and Performance Criterion

Severity Level:

Input and Output AC Power Ports.

- Voltage Dips.
- Voltage Interruptions.

Environmental Phenomena	Test Specification	Units	Performance Criterion
Voltage Dips	70 25	% Reduction period	C
	40 10	% Reduction period	C
Voltage Interruptions	0 0.5	% Reduction period	C

Performance criterion: B, C, C

- A. The apparatus shall continue to operate as intended during the test. No degradation of performance or loss of function is allowed below a performance level (or permissible loss of performance) specified by the manufacturer, when the apparatus is used as i
- B. The apparatus shall continue to operate as intended after the test. No degradation of performance or loss of function is allowed below a performance level (or permissible loss of performance) specified by the manufacturer, when the apparatus is used as intended. During the test, degradation of performance is allowed, however, no change of actual operating state or stored data is allowed. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and from what the user may reasonably expect from the apparatus if used as intended.

- C. Temporary loss of function is allowed, provided the function is self-recoverable or can be restored by the operation of the controls, or by any operation specified in the instructions for use.

12.4. EUT Configuration on Test

The configuration of EUT is the same as used in conducted emission test. Please refer to Section 2.10.

12.5. Operating Condition of EUT

Same as conducted emission test, which is listed in Section 2.10 except the test set up replaced as Section 13.1.

12.6. Test Procedure


- 1) Set up the EUT and test generator as shown on section 13.1
- 2) The interruption is introduced at selected phase angles with specified duration. There is a 3mins minimum interval between each test event.
- 3) After each test a full functional check is performed before the next test.
- 4) Repeat procedures 2 & 3 for voltage dips, only the level and duration is changed.
- 5) Record any degradation of performance.


12.7. Test Result



N/A


13. EUT PHOTOGRAPHS






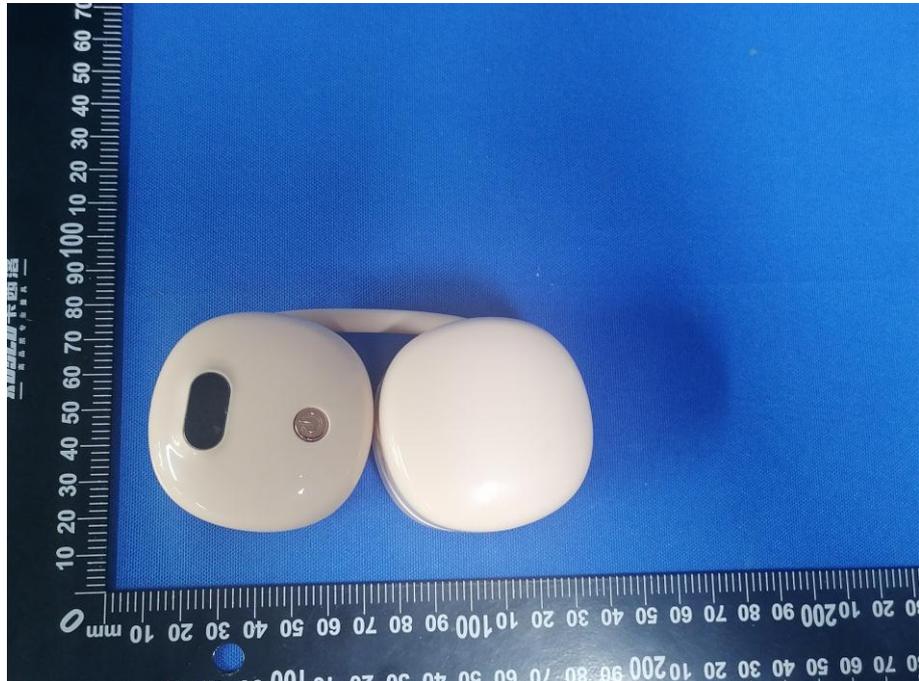


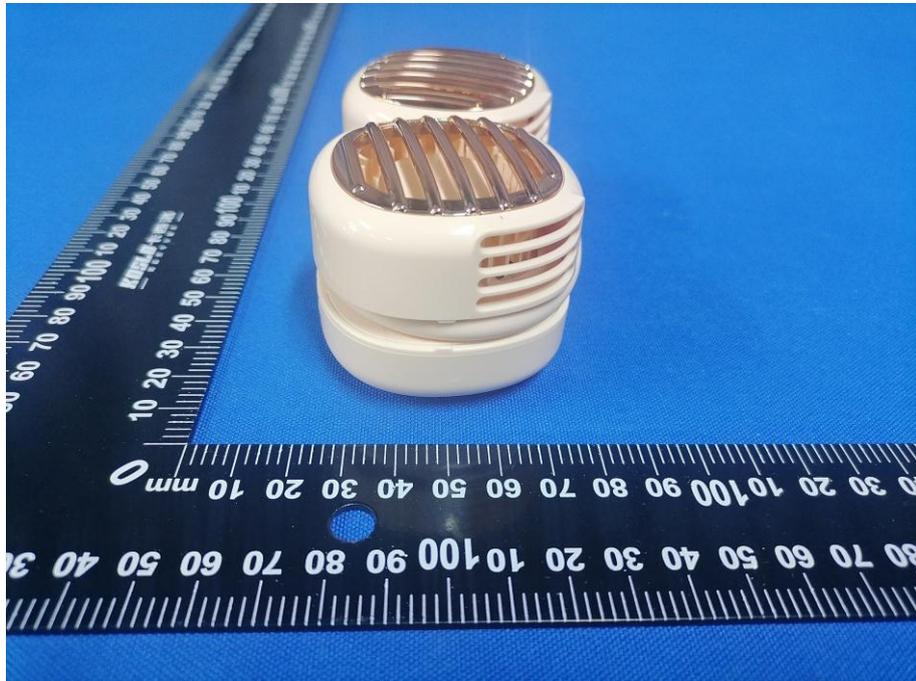


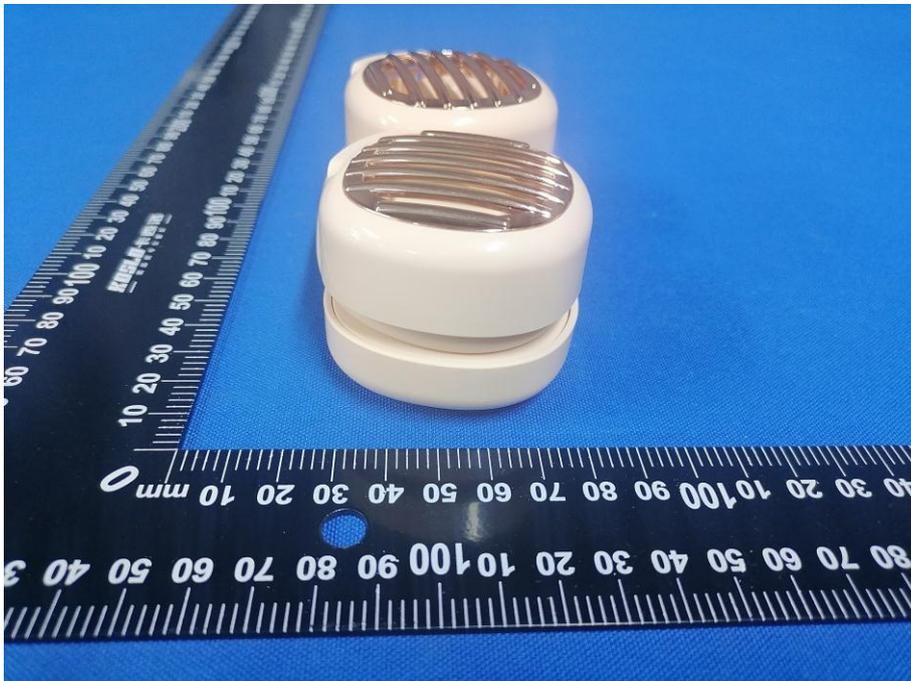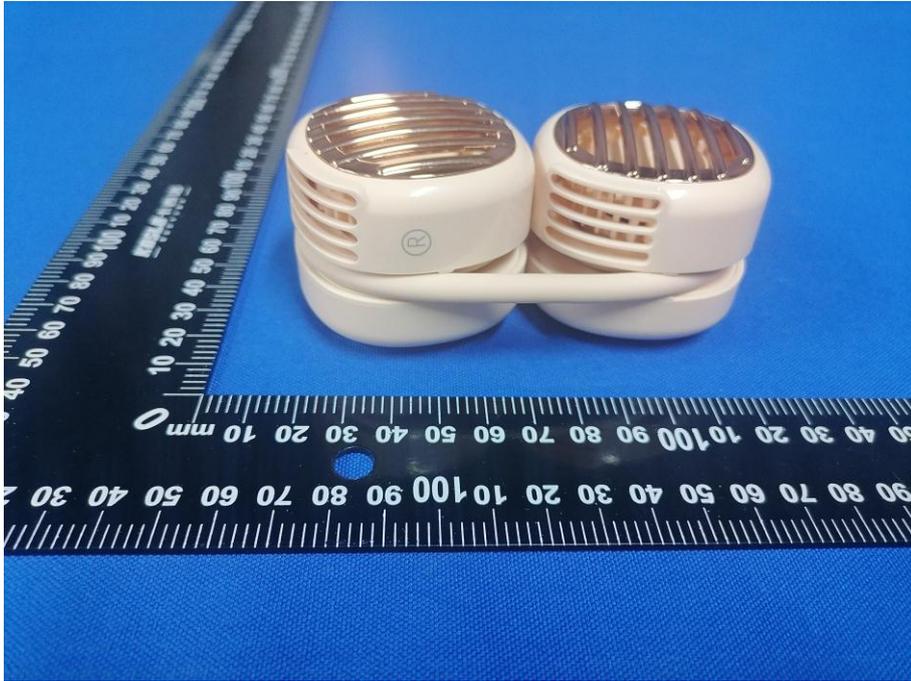

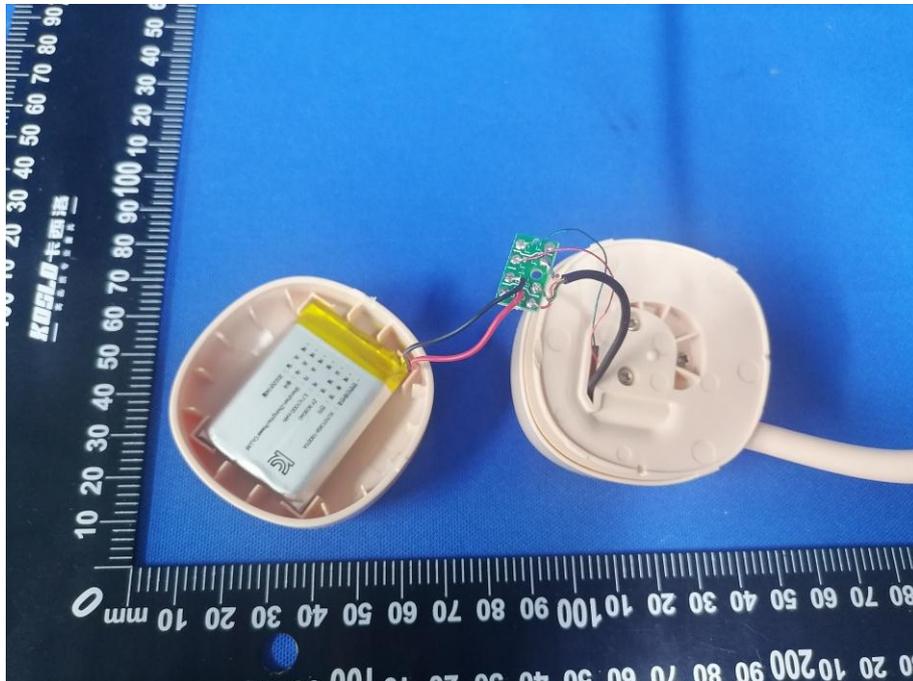

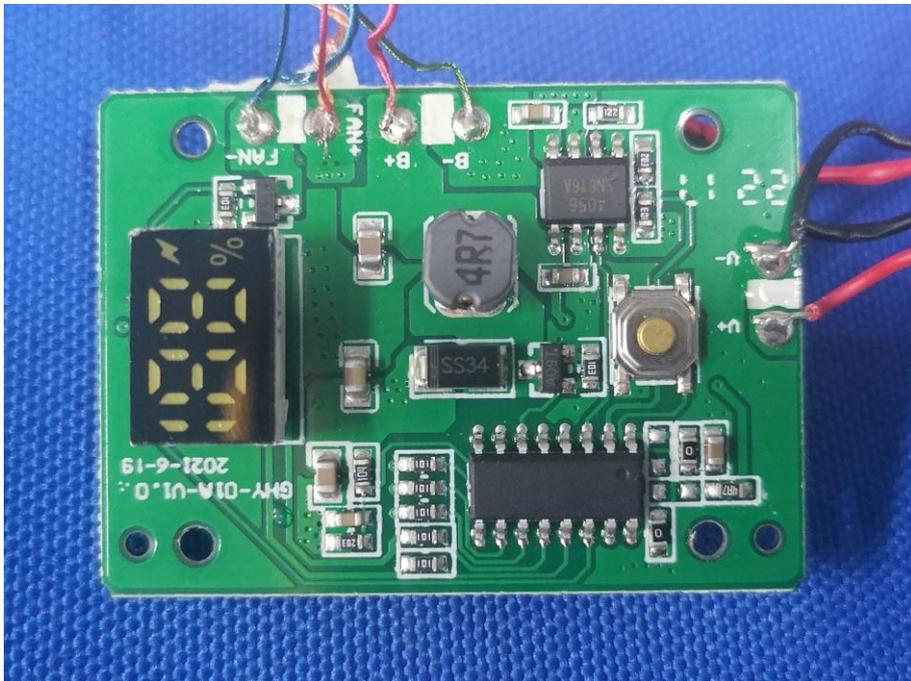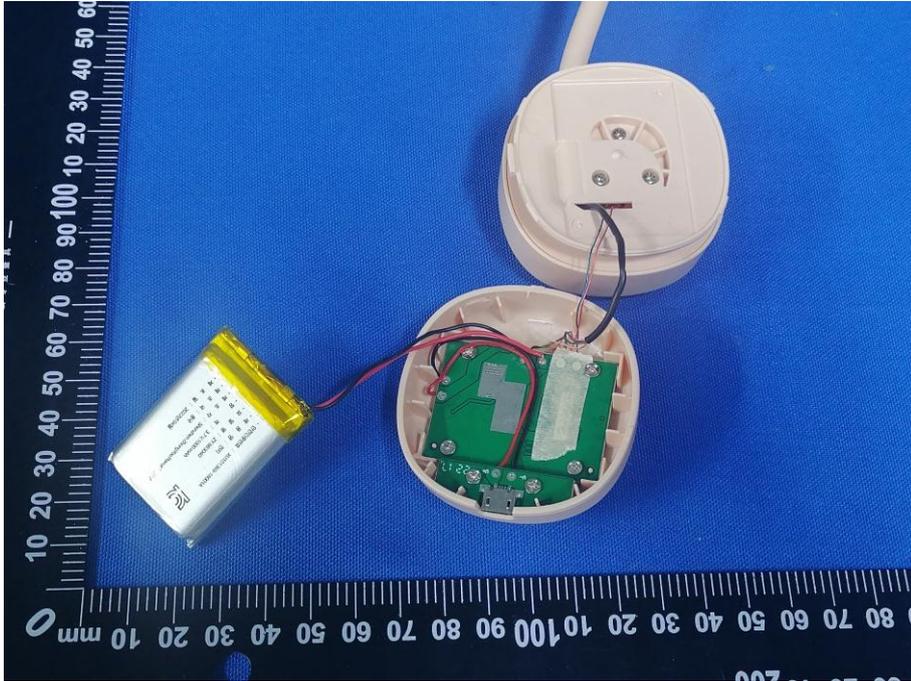

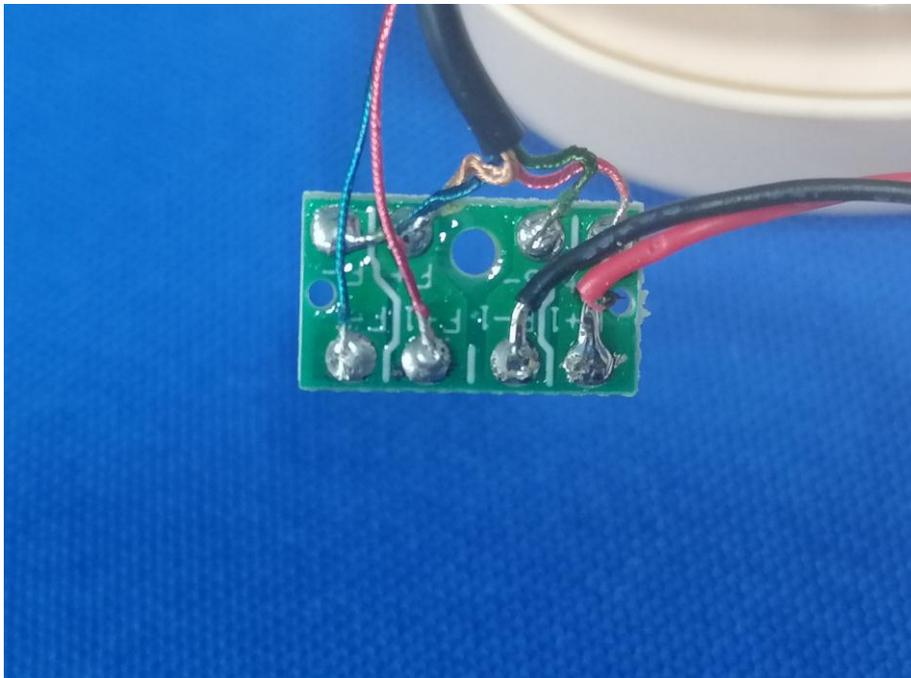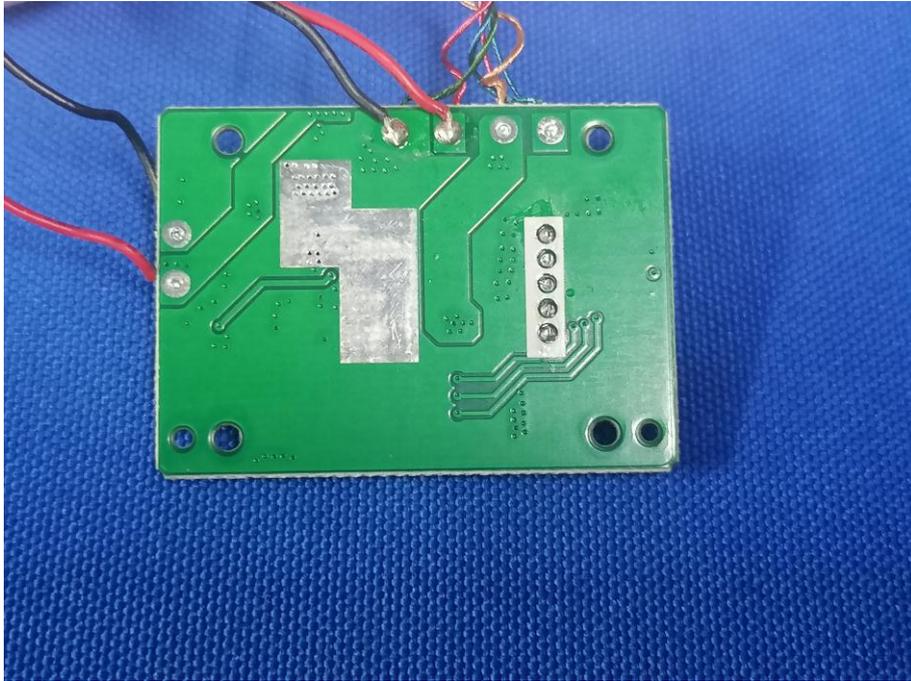

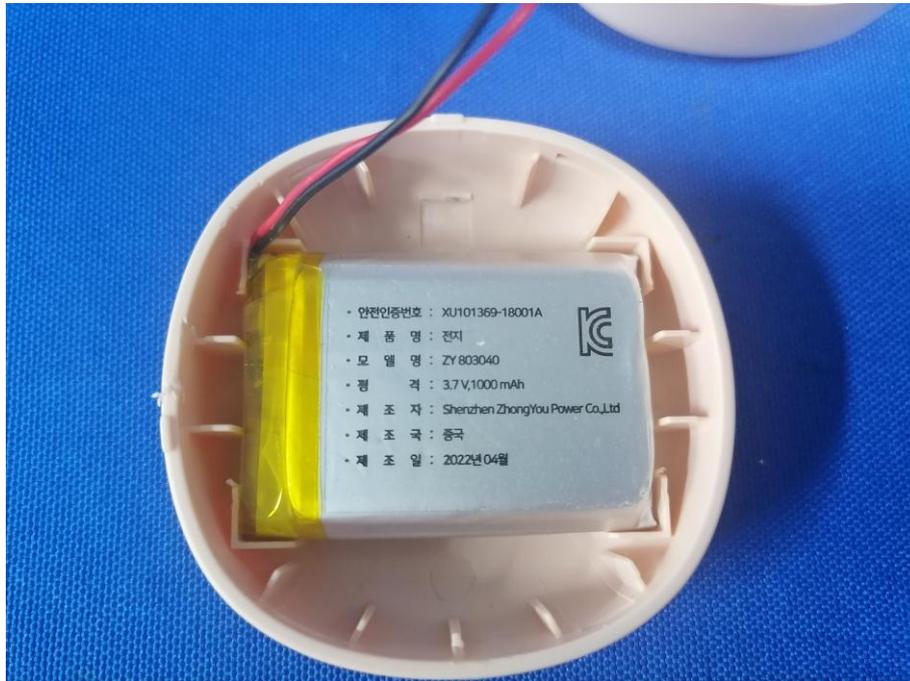

***** END OF REPORT *****